




DECK ACCESSORIES




RIDGE OR VALLEY PLATE (20 GA.)
10'-0" LENGTHS
GALVANIZED ONLY




FLAT PLATE (20 GA)
10'-0" LENGTHS
GALVANIZED ONLY




FILLER SHEET (20 GA.)
10'-0" LENGTHS
GALVANIZED ONLY



RUBBER CLOSURES
TOP & UNDERSIDE



INSIDE OR OUTSIDE CLOSURE (20 GA.)
10'-0" LENGTHS
GALVANIZED ONLY



CANT STRIP (20 GA)
10'-0" LENGTHS
GALVANIZED ONLY


Screws:

- Sidelap - #10 - 16 x 3/4" (Type 2) Standard
- #12 - 14 x 3/4" (Type 3) Optional
- Support - #12 - 24 x 1 1/4" (Type 5)
- Increments of 1000 pieces




WELDING WASHER
16 GAGE
3/8" = HOLE


Sump Pans (Flat/Recessed)
Holes to be cut in the field by others

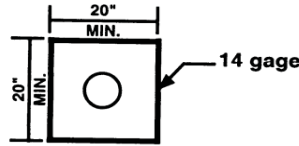

Flat Sump Pan
20" x 20" x 14 GAGE Standard




Recessed Sump Pan
29" x 33" x 14 GAGE Standard

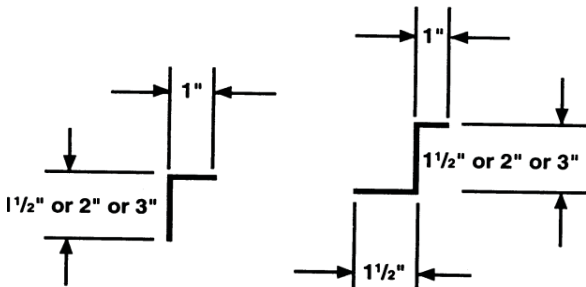


CELL CLOSURE

"Z" CLOSURE

10'-0" LENGTHS
GALVANIZED ONLY (20 GA.)

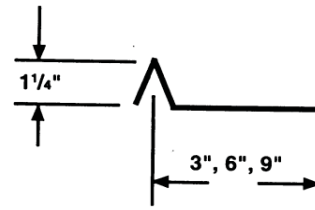


GIRDER FILLER



To be cut in
Field by Others
COLUMN CLOSURES
2 pcs
12" x 24" x 20 GAGE

**ROLLED IN
HANGER TAB**

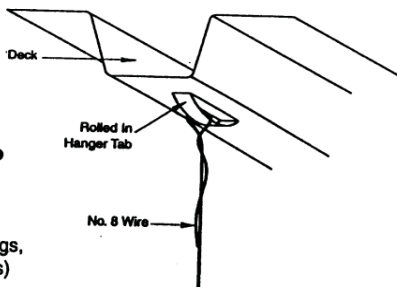


Integral Hanger Tab
Allowable load 100 lb.
(Types 20, 18, & 16)
(Not to be used for
suspended plaster ceilings,
walkways, and/or utilities)

**Recommended Girder
Filler Thickness**

L CLEAR SPAN	METAL GAGE (TYPE)
0" to 5"	20
5"+ to 7-1/2"	16
7-1/2"+ to 9"	14

* Not to exceed 12". Above gages are based on flat material with no strength increase due to its shape



Piercing Hanger Tab
Allowable Load 250 lb. when
imbedded in concrete.